

TRUMBULL

1040 N. Meridian Rd., P.O. Box 1556, Youngstown, Ohio 44501
 Phone: 330.799.3333 • Toll Free: 800.677.1799 • FAX: 330.797.3215

www.trumbull-mfg.com


TIE-LUGS

TRUMBULL TIE-LUGS are made from Ductile Iron for use in restraining mechanical joint valves, fittings, pipe and hydrants with threaded rod.


Cast from high strength Ductile Iron with a tensile strength of 80,000 psi and a yield strength of 60,000 psi.

Trumbull Tie-Lugs are intended for use between MJ bell and gland in sizes 4" through 16".


NOTE: Quantity that should be used on each joint depends on pipe diameter, line pressure and other factors; consult your Engineer for quantity required.

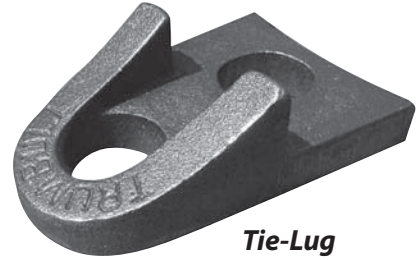

Tie-Lug

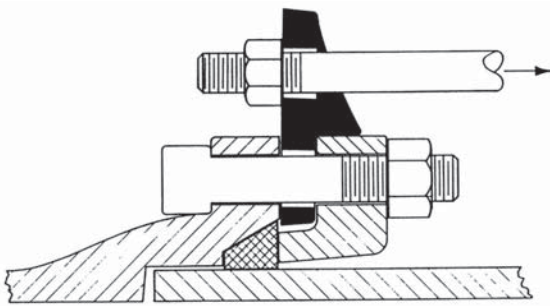

Tie-Lugs and Tie-Bolts are particularly useful to extend threaded rod by spanning across valves and other components.

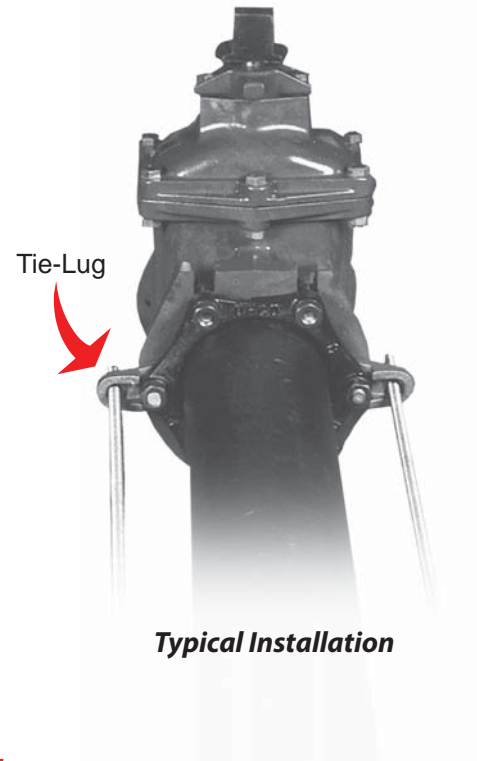

Typical Installation

<u>Trumbull Item No.</u>	<u>Description</u>	<u>Weight</u>
364-3395	Tie-Lug (domestic)	0.8 lbs.
364-9035	Tie-Lug (imported)	0.8 lbs.

TIE-BOLT

For 4" through 12" Mechanical Joints

Used in place of T-Head Bolt. Threaded rod passes through eye and is retained with heavy hex nut.

<u>Trumbull Item No.</u>	<u>Description</u>	<u>Weight</u>
364-4000	3/4" Tie-Bolt, Low Carbon Steel, less nut	1.0 lbs.
112-1328	3/4" Heavy Hex Nut (plated carbon steel)	0.2 lbs.



Tie-Bolt