

SOCKET CLAMPS

Also known as "Retainer Clamps" or "Friction Clamps"

For use in preventing underground pipe joints from separating.


Designed for use on ductile iron pipe. All socket clamps include two steel half clamps, two bolts and nuts and two cast iron washers. Used with all-thread rod and Trumbull tie-lugs or tie-bolts for joint restraint. See photos for typical installations.

See separate literature on Trumbull tie-lugs and tie bolts.

| <u>Trumbull Item No.</u> | <u>Size</u> | <u>Bolt Size</u> | <u>Stock Size</u> | <u>Pipe OD*</u> | <u>Weight</u> |
|--------------------------|-------------|------------------|-------------------|-----------------|---------------|
| 364-3401 | 3" | 5/8" x 3" | 3/8" x 2" | 3.96 | 8 lbs. |
| 364-3402 | 4" | 5/8" x 3" | 1/2" x 2" | 4.80 | 10 lbs. |
| 364-3403 | 6" | 5/8" x 3" | 1/2" x 2" | 6.90 | 12 lbs. |
| 364-3404 | 8" | 5/8" x 3" | 1/2" x 2" | 9.05 | 14 lbs. |
| 364-3405 | 10" | 5/8" x 3" | 1/2" x 2" | 11.10 | 16 lbs. |
| 364-3406 | 12" | 5/8" x 3-1/2" | 1/2" x 2" | 13.20 | 17 lbs. |
| 364-3428 | 14" | 7/8" x 4" | 3/4" x 3" | 15.80 | 49 lbs. |
| 364-3429 | 16" | 1" x 4-1/2" | 3/4" x 4" | 17.40 | 70 lbs. |
| 364-3430 | 18" | 1-1/4" x 4-1/2" | 3/4" x 4" | 19.50 | 79 lbs. |
| 364-3431 | 20" | 1-1/4" x 4-1/2" | 3/4" x 4-1/2" | 21.60 | 91 lbs. |
| 364-3432 | 24" | 1-1/2" x 5" | 3/4" x 5" | 25.80 | 118 lbs. |

* Socket Clamps are designed for centrifugally-spun cast & DI pipe with OD's as shown.

| <u>Trumbull Item No.</u> | <u>Description</u> |
|--------------------------|-----------------------------------|
| 364-9000 | Washer for 3" - 12" socket clamps |

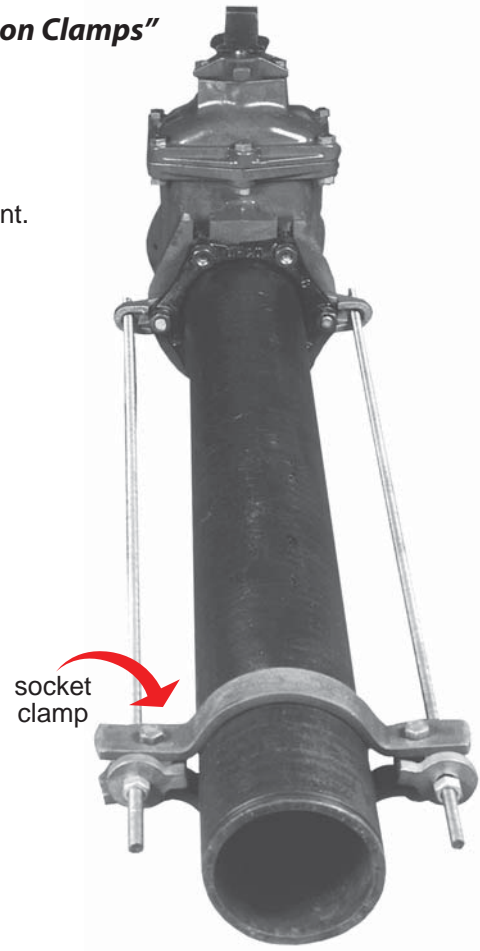

Typical Installation