


36" Ductile Iron Indicating Floorstand


Sealed Indicator Slot

TRUMBULL 36" DUCTILE IRON INDICATING FLOORSTANDS are designed for installation in treatment plants and pump stations to allow operation of valves at a lower elevation. Set screw secures handwheel to stem. Flange can be machined to facilitate mounting of actuator, if required (also available with gear operators). Stocked for "open left" valves; also available for "open right" valves. Standard stem threading allows up to 196 turns; optional threading allows up to 784 turns. Stainless drive pin supplied with assembly. Also available in cast stainless steel (page G-45 & G-46). See page G-28 for custom Floorstand options.

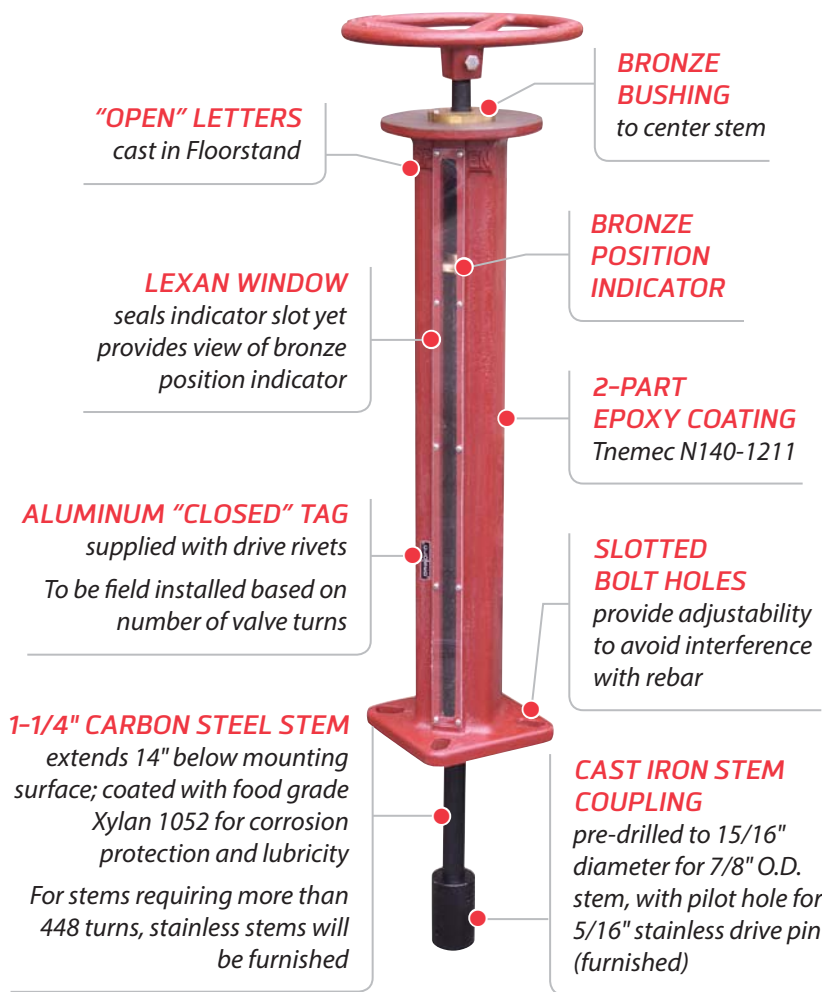


Ordering Instructions

1. Quantity required
2. Floorstand item number: **367-2421**
3. O.D. of extension stem being used, for drilling of connecting couplings
4. Wall Bracket, if required
 - a. Ductile iron item number: **367-2451**
 - b. Stainless steel item number: **367-2461**

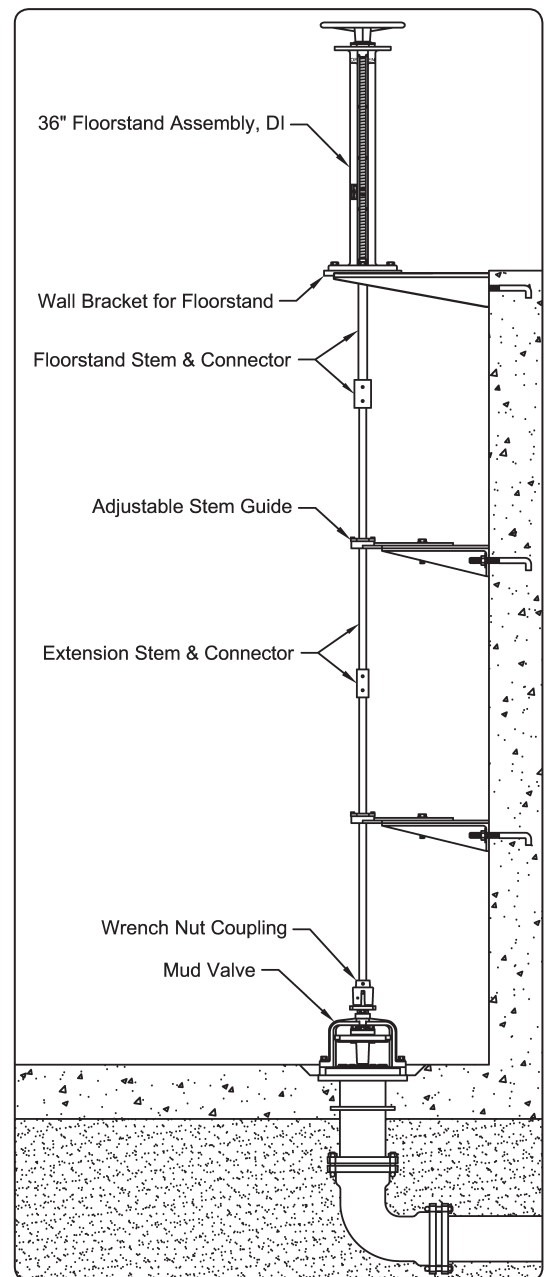

Typical Floorstand installation

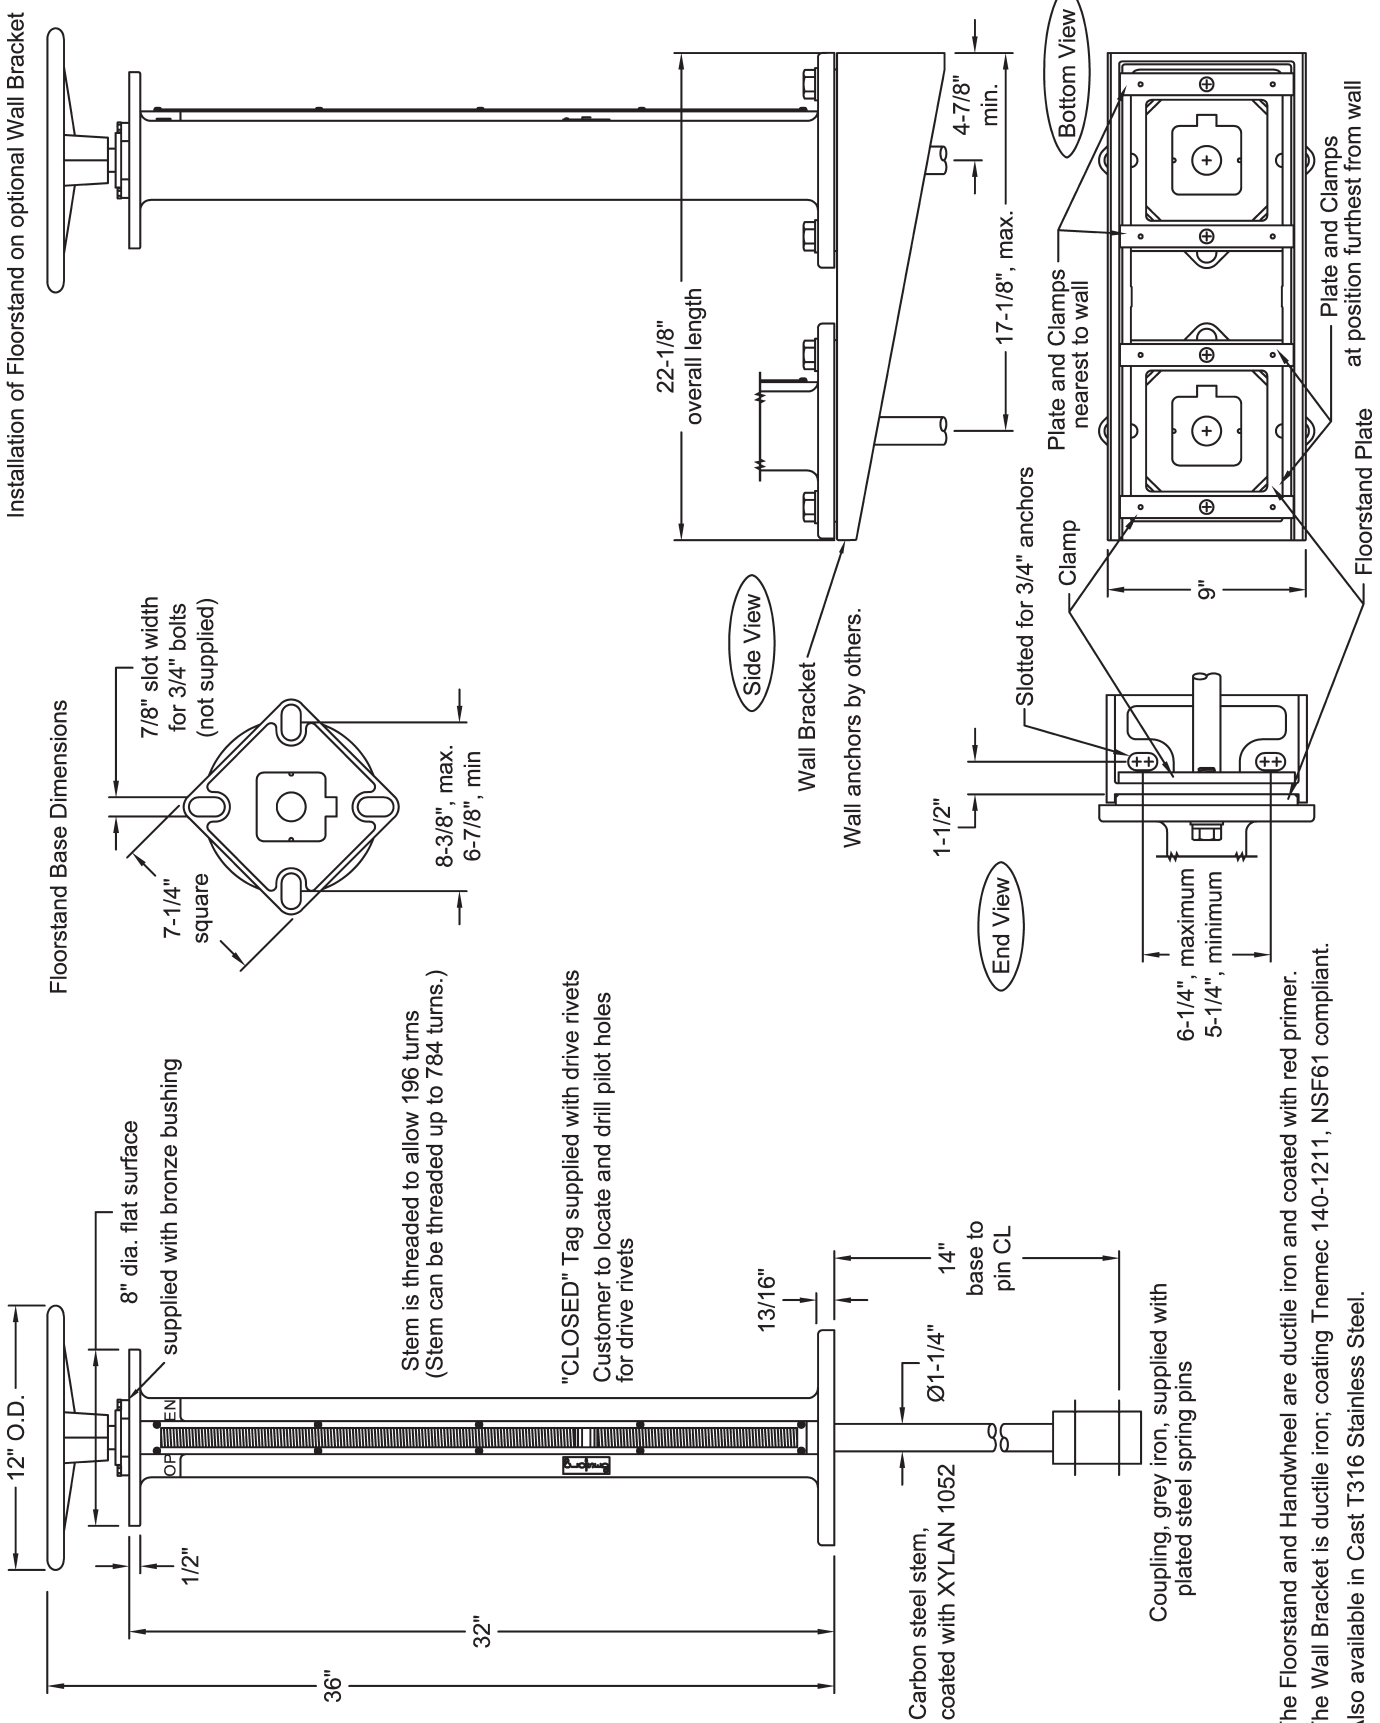

Drawn:	Drawing Revision:	
Date	Rev.	Date
5/20/08	G	11/11/2012

TRUMBULL INDUSTRIES
 P.O. Box 1556
 1040 N. Meridian Rd.
 Youngstown, Ohio 44501

Drawn to Scale
INDICATING FLOORSTAND
36" DUCTILE IRON