


## Socket Clamps

Also known as "Retainer Clamps" or "Friction Clamps"

For use in preventing underground pipe joints from separating.

Designed for use on ductile iron pipe. All Socket Clamps include two steel half clamps, two bolts and nuts and two washers. Used with all-thread rod and Trumbull Tie-Lugs or Tie-Bolts for joint restraint.

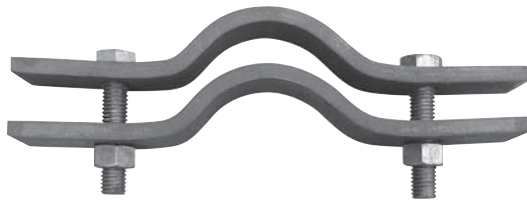

**SOCKET CLAMP**  
Shipped as illustrated

Trumbull Item No.	Size*	Bolt Size	Stock Size	Pipe OD**	Weight
<b>364-3401</b>	3"	5/8" x 3"	3/8" x 2"	3.96	5.65 lbs.
<b>364-3402</b>	4"	5/8" x 3"	1/2" x 2"	4.80	7.15 lbs.
<b>364-3403</b>	6"	5/8" x 3"	1/2" x 2"	6.90	8.75 lbs.
<b>364-3404</b>	8"	5/8" x 3"	1/2" x 2"	9.05	10.60 lbs.
<b>364-3405</b>	10"	5/8" x 3"	1/2" x 2"	11.10	12.35 lbs.
<b>364-3406</b>	12"	5/8" x 3-1/2"	1/2" x 2"	13.20	13.80 lbs.
<b>364-3428</b>	14"	7/8" x 4"	3/4" x 3"	15.80	48.00 lbs.
<b>364-3429</b>	16"	1" x 4-1/2"	3/4" x 4"	17.40	70.00 lbs.
<b>364-3430</b>	18"	1-1/4" x 4-1/2"	3/4" x 4"	19.50	79.00 lbs.
<b>364-3431</b>	20"	1-1/4" x 4-1/2"	3/4" x 4-1/2"	21.60	91.00 lbs.
<b>364-3432</b>	24"	1-1/2" x 5"	3/4" x 5"	25.80	118.00 lbs.

\* Sizes 3" through 12" are supplied with #585 cast washers which are shown below. Sizes 14" and larger are supplied with two fabricated carbon steel washers.

\*\* Socket Clamps are designed for centrifugally-spun cast & ductile iron pipe with OD's as shown.

### #585 Washer

- For 3" through 12" Socket Clamps
- Usage for 3/4" rod
- Two are required for each Socket Clamp

Trumbull Item No.	Bore Size	Weight
<b>364-9000</b>	1"	0.80 lbs.

