
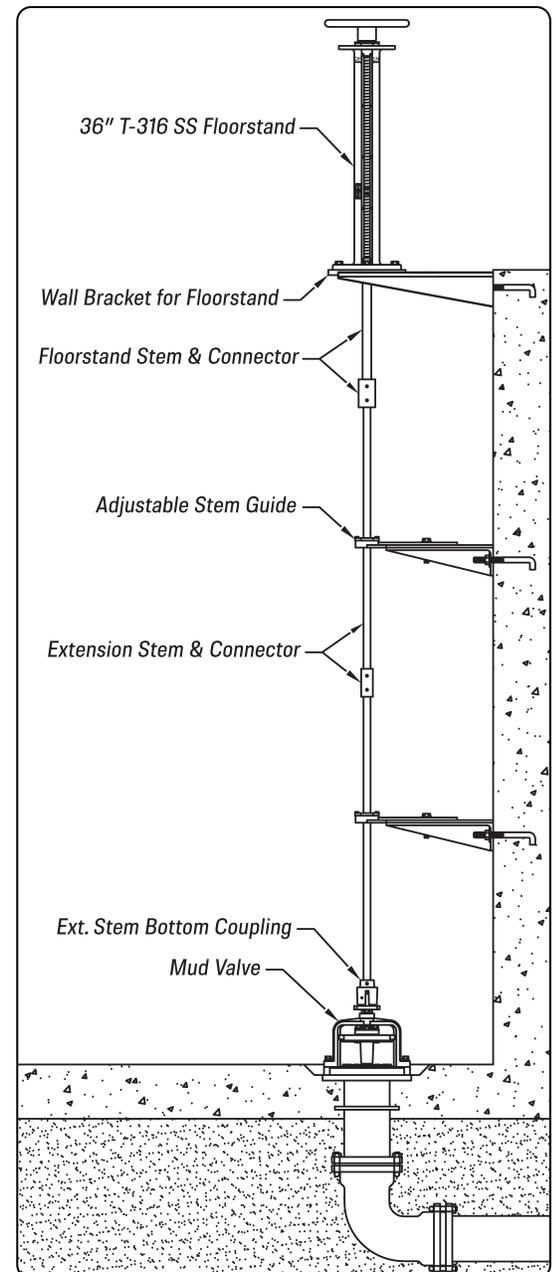


## 36" Stainless Steel Indicating Floorstand

Includes a Sealed Indicator Slot


Trumbull 36" Stainless Steel Indicating Floorstands are designed for installation in treatment plants and pump stations to allow operation of valves at a lower elevation. Stainless steel drive pin secures handwheel to stem. Flange can be machined to facilitate mounting of actuator, if required (also available with gear operators). Stocked for "open left" valves; also available for "open right" valves. Standard stem threading allows up to 196 turns; optional threading allows up to 784 turns. Also available in ductile iron (see page G-47 and G-48). See page G-34 for custom Floorstand options.

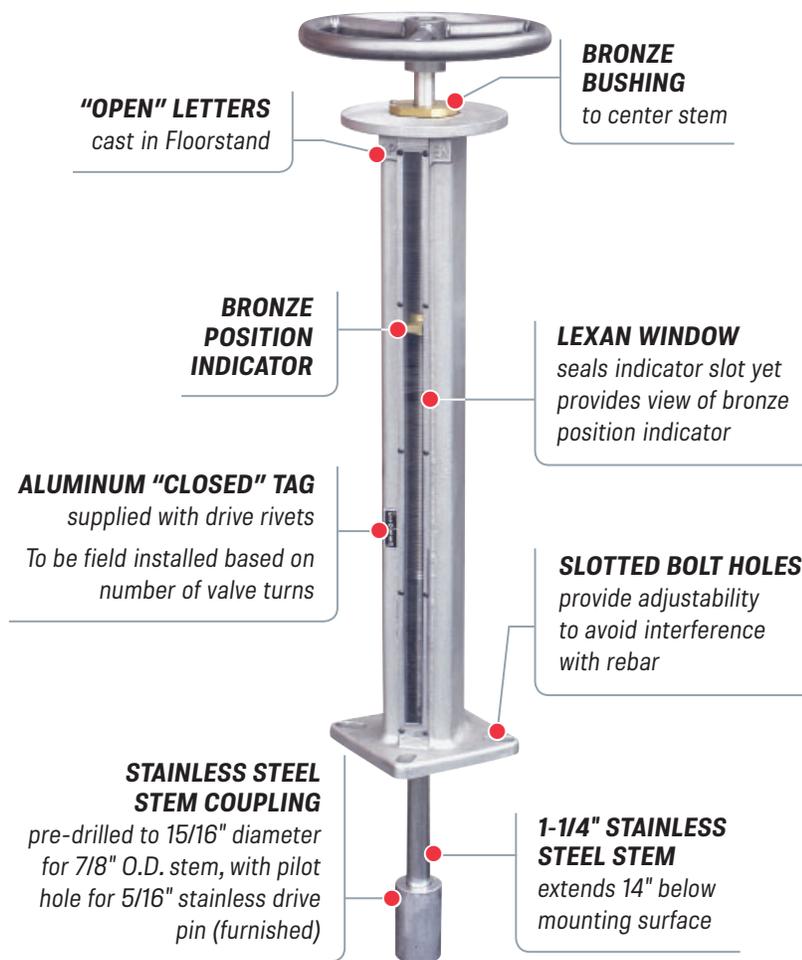




Typical Floorstand installation

### Ordering Instructions

1. Quantity required
2. Floorstand item number: **367-2431**
3. O.D. of extension stem being used, for drilling of connecting couplings
4. Stainless steel Wall Bracket, if required: item number: **367-2461**

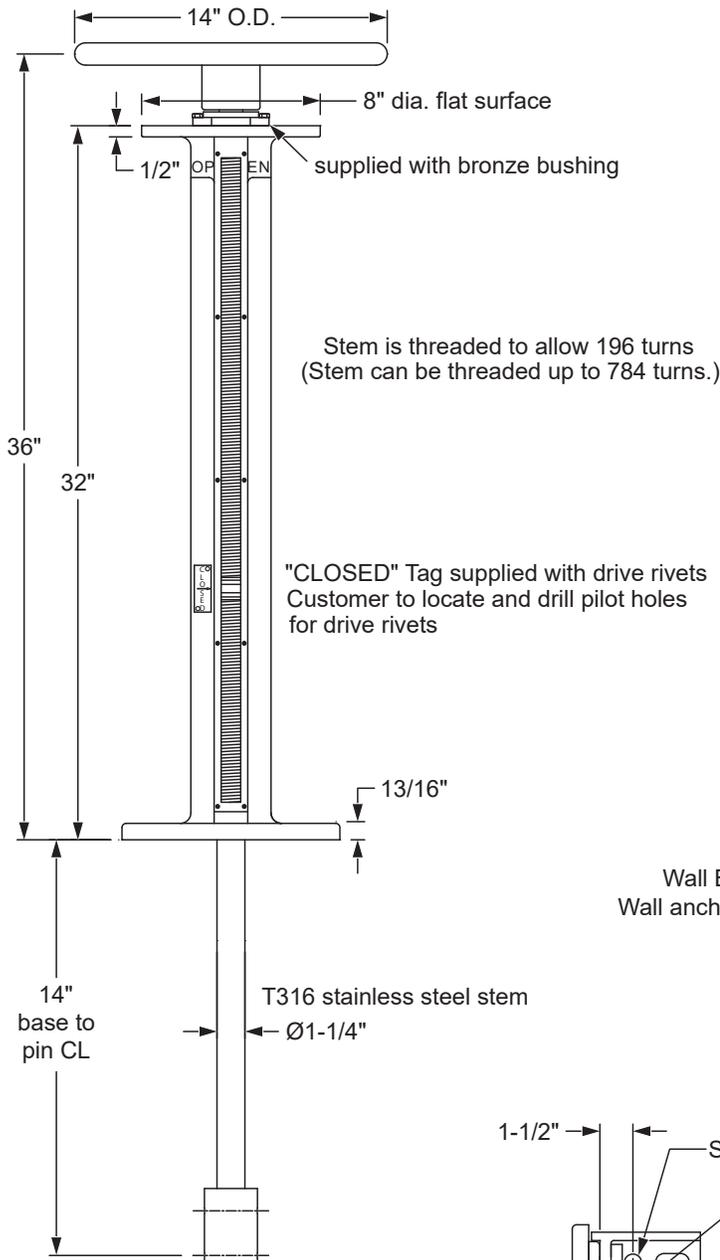

### Installation of Floorstand on Wall Bracket

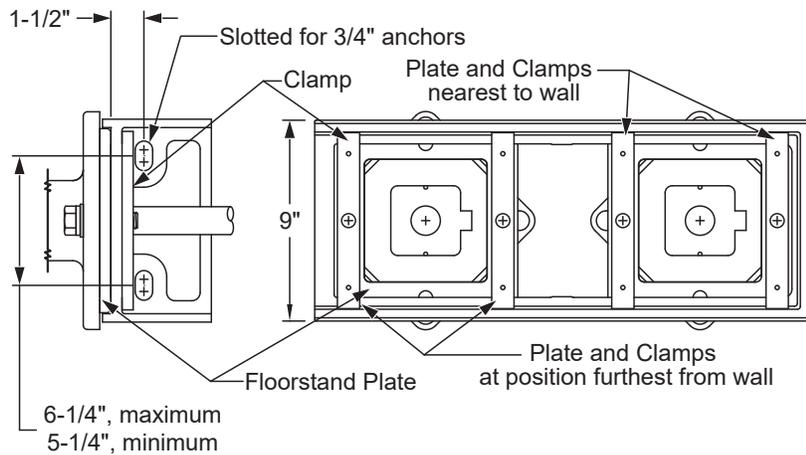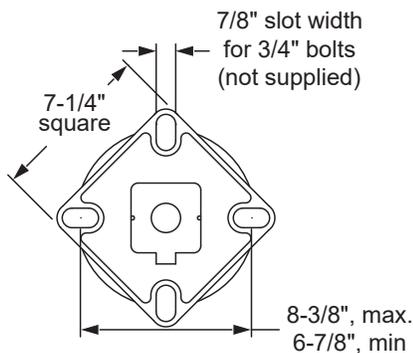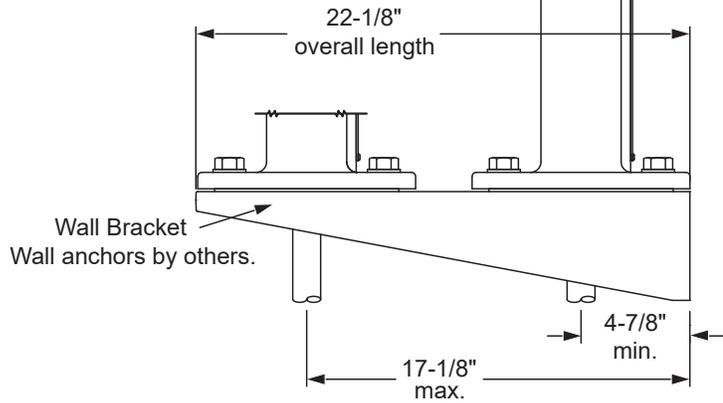

The Floorstand, Handwheel and Wall Bracket are T316 Stainless Steel castings.

**Indicating Floorstand  
36" Stainless Steel**  
Drawn to Scale

Drawn:  
FCN  
05/20/08

Revision:  
FCN  
11/11/12

**Trumbull Manufacturing**  
Youngstown, Ohio  
www.trumbull-mfg.com