


## Chain Lever

Used for Manual Operation of Quarter-Turn Valves Installed Overhead

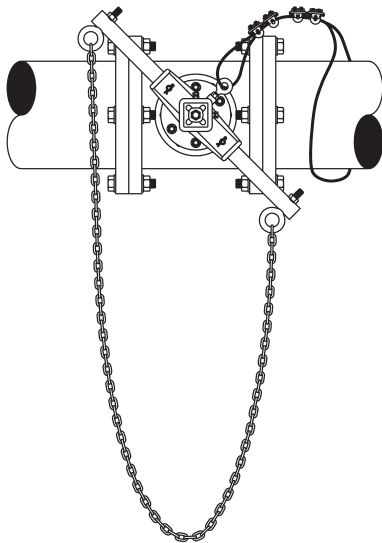

Trumbull Chain Levers save the unnecessary expense of adding a gear and chainwheel to valves that don't require a gear to operate.

Handles are 1" sch 40 pipe. Stocked with an overall length of 24"; longer lengths made to order. Our Chain Levers are designed to fit on a 2" square nut whose flat sides are parallel to the flow line, when the valve is either fully open or closed (see illustration on left). To our knowledge, our Chain Lever will properly operate all plug valves, other than Milliken.

**PLATED EYEBOLTS, HARDWARE AND CONNECTOR LINKS**  
furnished standard

**HEAVY DUTY DUCTILE IRON HEAD CASTING**  
stronger, yet lighter than grey iron

**TAPPED FOR STANDARD EYEBOLT**  
used for installation of our secondary safety restraint system which should be attached to an adjacent pipe or valve component (see pages G-65 and G-66)

**i** The Chain Lever should be bolted or pinned to the valve stem, then fastened to the 2" nut with cap screw and jam nut

**PLATED CLEVIS PIN AND COTTER KEY**  
join handle to head

**OPENING IN CASTING**  
allows for secure fastening to valve stem

### Chain Lever

Includes handles and hardware.

Item No	Overall Length	Weight
<b>367-9988</b>	24"	8.50 lbs.

### Chain Lever Accessories

For machine chain, order specific length required.

Description	Item No	Weight
Machine Chain, straight link, size 2/0	<b>172-1219</b>	0.32 lbs./ft.
Secondary Safety Restraint Kit, less eyebolt	<b>367-1975</b>	1.25 lbs.
Eyebolt, for Secondary Safety Restraint Kit	<b>367-1974</b>	0.25 lbs.