

Pipe Size	Pipe O.D.	Flange O.D.	Bolt Holes			Bolt Dia.	Lug Thickness	Tie Rods		Weight pounds
			Hole CL	Qty.	Hole D.			Hole D.	Rod D.	
3"	3.96"	7.5"	6"	4	3/4"	5/8"	1/2"	3/4"	5/8"	1.25
4"	4.80"	9"	7.5"	8	3/4"	5/8"	1/2"	3/4"	5/8"	1.00
6"	6.90"	11"	9.5"	8	7/8"	3/4"	1/2"	3/4"	5/8"	1.26
8"	9.05"	13.5"	11.75"	8	7/8"	3/4"	1/2"	3/4"	5/8"	1.56
10"	11.10"	16"	14.25"	12	1"	7/8"	3/4"	7/8"	3/4"	2.35
12"	13.20"	19"	17"	12	1"	7/8"	3/4"	7/8"	3/4"	2.75
14"	15.30"	21"	18.75"	12	1-1/8"	1"	3/4"	7/8"	3/4"	3.45
16"	17.40"	23.5"	21.25"	16	1-1/8"	1"	1"	1-1/8"	1"	4.25
18"	19.50"	25"	22.75"	16	1-1/4"	1-1/8"	1"	1-1/8"	1"	5.00
20"	21.60"	27.5"	25"	20	1-1/4"	1-1/8"	1"	1-1/8"	1"	4.50
24"	25.80"	32"	29.5"	20	1-3/8"	1-1/4"	1-1/8"	1-1/4"	1-1/8"	6.75
30"	32.00"	38.75"	36"	28	1-3/8"	1-1/4"	1-1/4"	1-3/8"	1-1/4"	6.90
36"	38.30"	46"	42.75"	32	1-5/8"	1-1/2"	1-1/4"	1-3/8"	1-1/4"	7.05
42"	44.50"	53"	49.5"	36	1-5/8"	1-1/2"	1-1/4"	1-3/8"	1-1/4"	8.80
48"	50.80"	59.5"	56"	44	1-5/8"	1-1/2"	1-1/2"	1-5/8"	1-1/2"	9.75
54"	57.56"	66.25"	62.75"	44	1-7/8"	1-3/4"	1-3/4"	1-5/8"	1-1/2"	15.60
60"	61.61"	73"	69.25"	52	1-7/8"	1-3/4"	1-3/4"	1-5/8"	1-1/2"	15.80

ANSI Class 125 B16.1 Drilling Template

Notes:


250 psi maximum pressure.

Type 304 stainless steel plate, or,

A36 structural steel plate with

TNEMEC red 37-77 primer.

Other finishes available.

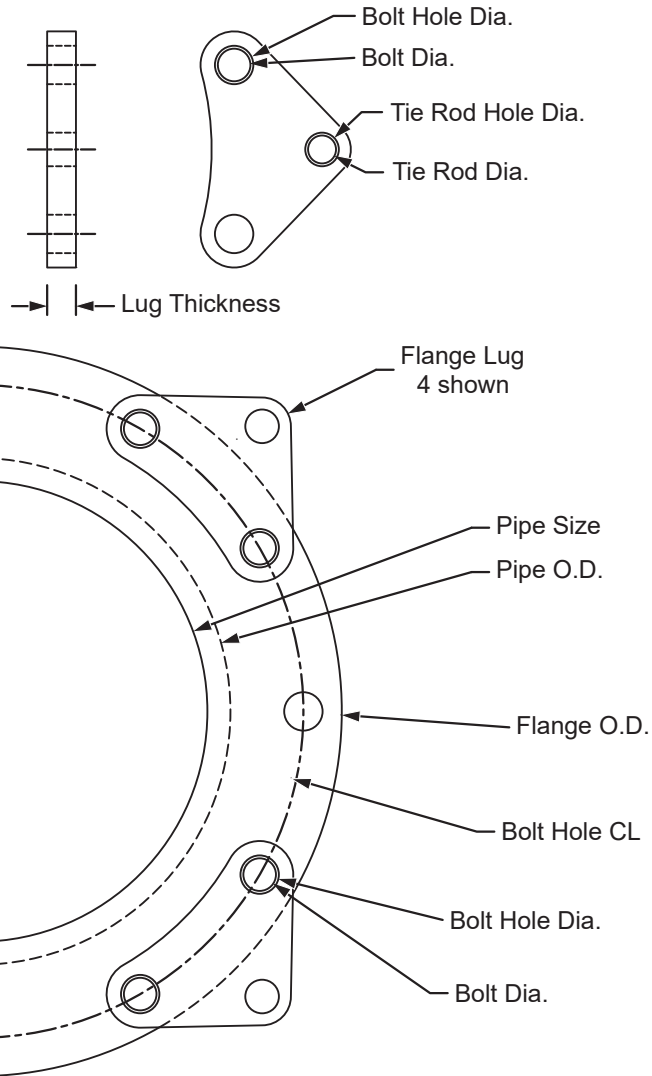

FLANGE LUGS

Drawn to Scale

Drawn:

FCN

01/04/11

Revision:

FCN

07/25/19



Trumbull Manufacturing

Youngstown, Ohio
www.trumbull-mfg.com