

TRUMBULL

Trumbull Manufacturing

3850 Hendricks Road, Youngstown, Ohio 44515

Phone: 330.270.7888 | Toll Free: 877.504.1507 | Fax: 330.392.0756

www.trumbull-mfg.com

TR-Series Connecting Links


Used to Connect Chain for Use with Sprocket Chainwheels

TR Series Connecting Links are used to connect single loop chain for use with Trumbull ductile iron and aluminum Sprocket-Type Chainwheels. Pre-formed Connecting Links eliminate the need to cut and bend chain to form a loop.

Available in three sizes; 1/0, 4/0 and 5/0.

Chain Size	Galvanized		316 Stainless Steel	
	Item No	Weight	Item No	Weight
1/0	367-1994	0.02 lbs.	367-1997	0.02 lbs.
4/0	367-1995	0.03 lbs.	367-1998	0.03 lbs.
5/0	367-1996	0.05 lbs.	----	----


INSTALLATION IS EASY,
JUST FOLLOW THESE FIVE STEPS ...

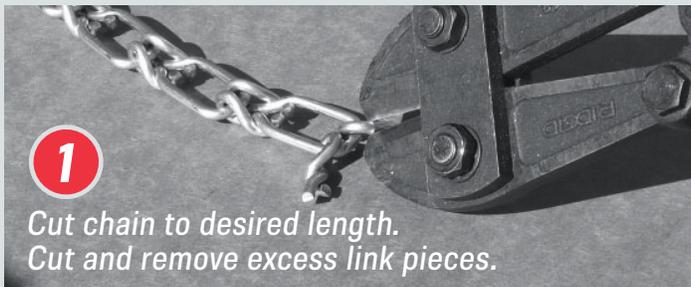

1
Cut chain to desired length.
Cut and remove excess link pieces.



2
Install connecting link
by inserting looped end of chain
into the open end of connecting link.

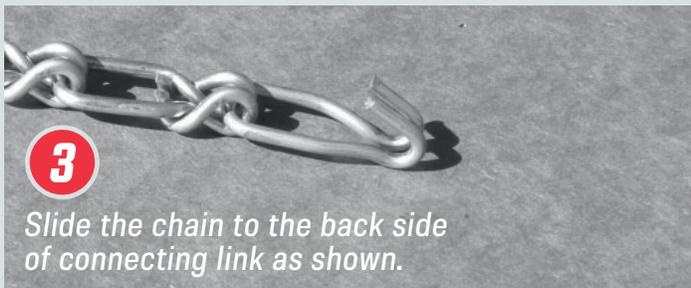

3
Slide the chain to the back side
of connecting link as shown.



4
Lay opposite end of chain
onto the connecting link.



5
Firmly grip connecting link
with pliers and/or adjustable
pliers and crimp the open end
of connecting link over to
complete connection.