


Socket Clamps

For Use in Preventing Underground Pipe Joints from Separating

Also known as "Retainer Clamps" or "Friction Clamps". Designed for use on DI pipe. All Socket Clamps include two steel half clamps, two bolts and nuts and two washers. Used with all-thread rod and Trumbull Tie-Lugs or Tie-Bolts for joint restraint (shown on page C-1).

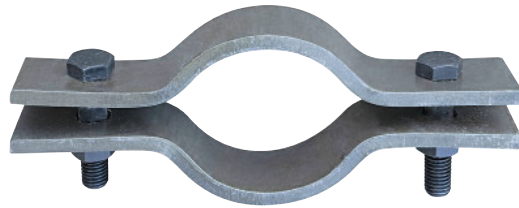

Carbon Steel Socket Clamps

Item No	Size*	Bolt Size	Stock Size	Pipe OD**	Weight
364-3401	3"	5/8" x 3"	3/8" x 2"	3.96	5.65 lbs.
364-3402	4"	5/8" x 3"	1/2" x 2"	4.80	7.15 lbs.
364-3403	6"	5/8" x 3"	1/2" x 2"	6.90	8.75 lbs.
364-3404	8"	5/8" x 3"	1/2" x 2"	9.05	10.60 lbs.
364-3405	10"	5/8" x 3"	1/2" x 2"	11.10	12.35 lbs.
364-3406	12"	5/8" x 3-1/2"	1/2" x 2"	13.20	13.80 lbs.
364-3428	14"	7/8" x 4"	3/4" x 3"	15.80	48.00 lbs.
364-3429	16"	1" x 4-1/2"	3/4" x 4"	17.40	70.00 lbs.
364-3430	18"	1-1/4" x 4-1/2"	3/4" x 4"	19.50	79.00 lbs.
364-3431	20"	1-1/4" x 4-1/2"	3/4" x 4-1/2"	21.60	91.00 lbs.
364-3432	24"	1-1/2" x 5"	3/4" x 5"	25.80	118.00 lbs.

Stainless Steel Socket Clamps

Item No	Size*	Bolt Size	Stock Size	Pipe OD**	Weight
803-3401	3"	5/8" x 3"	3/8" x 2"	3.96	5.75 lbs.
803-3402	4"	5/8" x 3"	1/2" x 2"	4.80	7.25 lbs.
803-3403	6"	5/8" x 3"	1/2" x 2"	6.90	8.90 lbs.
803-3404	8"	5/8" x 3"	1/2" x 2"	9.05	10.85 lbs.
803-3405	10"	5/8" x 3"	1/2" x 2"	11.10	12.65 lbs.
803-3406	12"	5/8" x 3-1/2"	1/2" x 2"	13.20	14.35 lbs.

* Sizes 3" through 12" are supplied with #585 cast washers which are shown on the right. Sizes 14" and larger are supplied with two fabricated carbon steel washers.

** Socket Clamps are designed for centrifugally-spun cast and ductile iron pipe with OD's as shown.



No. 585 Washers

- For 3" - 12" Socket Clamps
- Usage for 3/4" rod
- Two washers are required for each Socket Clamp

Item No	Material	Bore Size	Weight
364-9000	CS	1"	0.80 lbs.
803-9000	SS	1"	0.80 lbs.