

 US Patent No.'s 8,550,115 / 9,347,583 / 10,066,760

Valve Position Indicators

For Buried Service with 1-1/4" Square Extension Stems




Optional
DEBRIS SHIELD
keeps valve box
clean and Position
Indicator legible

**POSITION
INDICATOR**

**NO FIELD
DRILLING
OR PINNING
REQUIRED**
WITH SQUARE
EXTENSION STEMS!

- Eliminates broken valve stems caused by over-opening or over-closing
- Field-adjustable for any number of turns within the range of each model
- Constructed of heavy-duty, non-corrosive DuPont™ Delrin® polymer, providing high-impact resistance even in cold climates
- Double O-ring seals keep out water and dirt
- Third-party tested to over 1 million revolutions
- Provided with stainless steel hardware
- Also available for use above ground in the floor or with Wall Brackets (see pages F-9 to F-10)

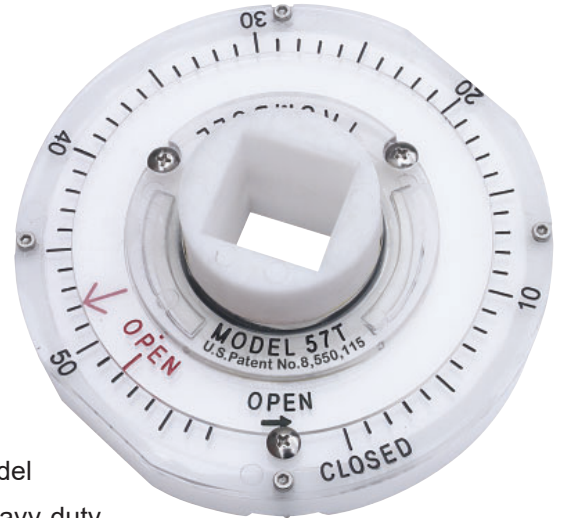


Ordering Instructions

1. Specify direction of open (open left or open right)
2. Model required (available in 57, 275 or 870 turns)

Model Number	Number of Turns	Open Left	Open Right
		Item No	Item No
57T	0 - 57	367-9394	367-9393
275T	0 - 275	367-9396	367-9395
870T	0 - 870	367-9400	367-9399

3. Extension Stem required (1-1/4" square)
 - a. Length required (provide "A" dimension on the illustration shown on right side of page F-2)
 - b. Carbon steel or stainless steel
 - c. Tubing or solid bar
4. Debris Shield, item **367-9415** is recommended for buried service


Exploded View of Square Extension Stem for Buried Service

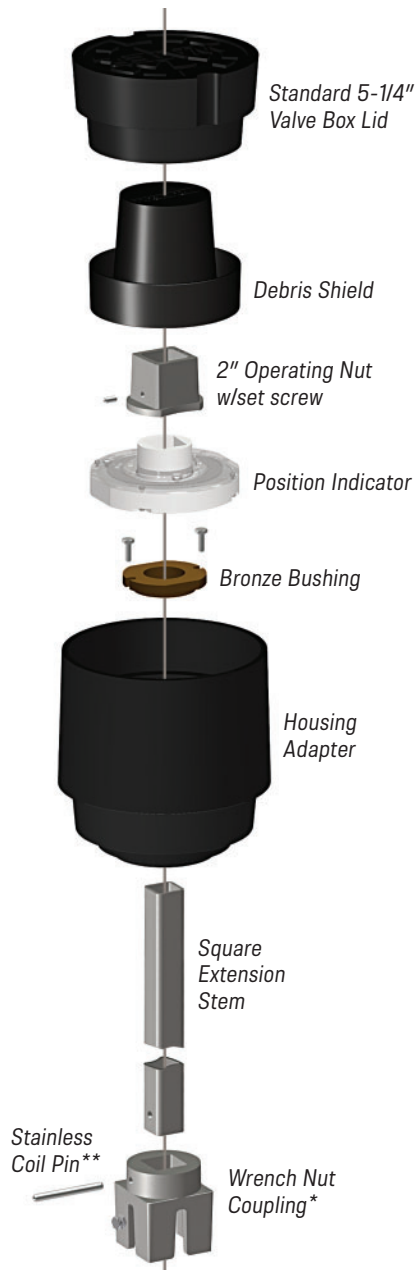

SQUARE EXTENSION STEM

* Wrench nut coupling welded to stem at factory.

** When bottom coupling is purchased separately, pin is provided.

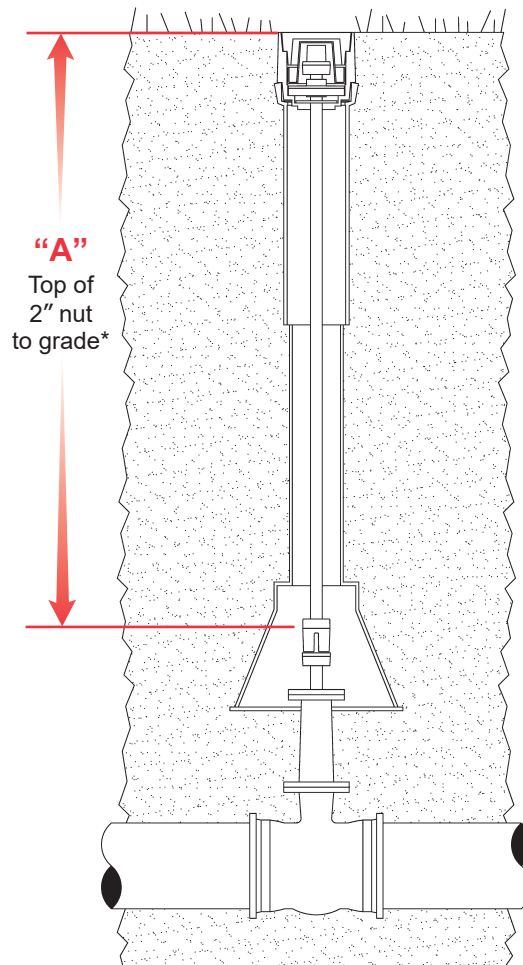

* The dimension from top of 2" valve nut to grade is used to determine Extension Stem length, per ordering instructions on page F-1.

i US Patent No.'s 8,550,115 / 9,347,583 / 10,066,760

Extension Stem Torque Ratings

Extension Stems rated for a minimum of 300 ft-lb.
For higher torque capacity, consult Trumbull.



Installation animations online:
www.youtube.com/trumbullmfg