
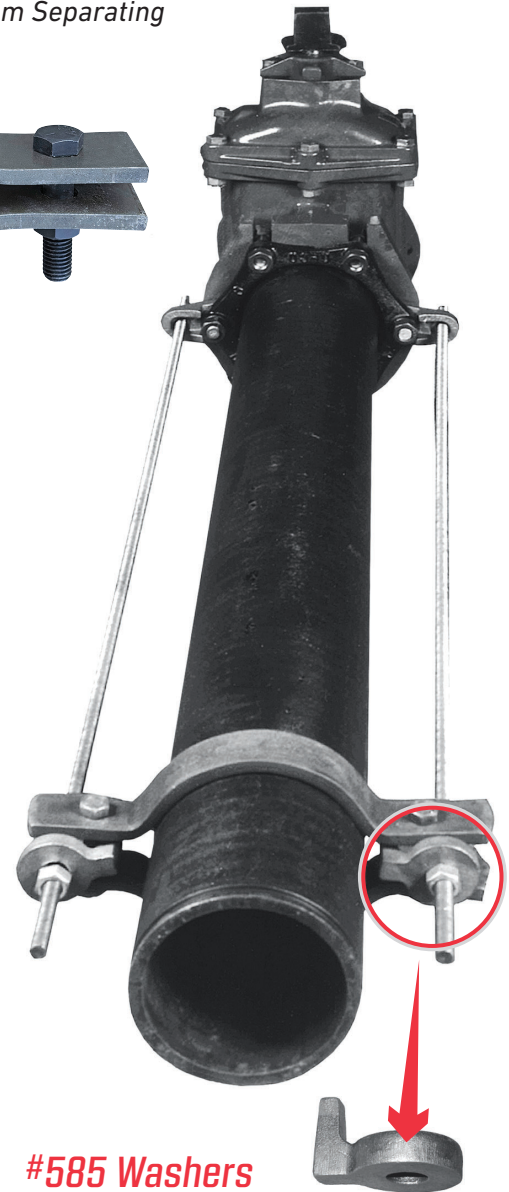


## Socket Clamps

For Use in Preventing Underground Pipe Joints from Separating

Also known as “Retainer Clamps” or “Friction Clamps”. Designed for use on DI pipe. All Socket Clamps include two steel half clamps, two bolts and nuts and two washers. Used with all-thread rod and Trumbull Tie-Lugs or Tie-Bolts for joint restraint (shown on page C-1).

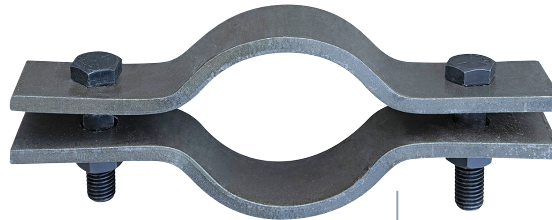

### Carbon Steel Socket Clamps

| Trumbull Item No. | Size* | Bolt Size       | Stock Size    | Pipe OD** | Weight      |
|-------------------|-------|-----------------|---------------|-----------|-------------|
| 364-3401          | 3"    | 5/8" x 3"       | 3/8" x 2"     | 3.96      | 5.65 lbs.   |
| 364-3402          | 4"    | 5/8" x 3"       | 1/2" x 2"     | 4.80      | 7.15 lbs.   |
| 364-3403          | 6"    | 5/8" x 3"       | 1/2" x 2"     | 6.90      | 8.75 lbs.   |
| 364-3404          | 8"    | 5/8" x 3"       | 1/2" x 2"     | 9.05      | 10.60 lbs.  |
| 364-3405          | 10"   | 5/8" x 3"       | 1/2" x 2"     | 11.10     | 12.35 lbs.  |
| 364-3406          | 12"   | 5/8" x 3-1/2"   | 1/2" x 2"     | 13.20     | 13.80 lbs.  |
| 364-3428          | 14"   | 7/8" x 4"       | 3/4" x 3"     | 15.80     | 48.00 lbs.  |
| 364-3429          | 16"   | 1" x 4-1/2"     | 3/4" x 4"     | 17.40     | 70.00 lbs.  |
| 364-3430          | 18"   | 1-1/4" x 4-1/2" | 3/4" x 4"     | 19.50     | 79.00 lbs.  |
| 364-3431          | 20"   | 1-1/4" x 4-1/2" | 3/4" x 4-1/2" | 21.60     | 91.00 lbs.  |
| 364-3432          | 24"   | 1-1/2" x 5"     | 3/4" x 5"     | 25.80     | 118.00 lbs. |

### Stainless Steel Socket Clamps

| Trumbull Item No. | Size* | Bolt Size     | Stock Size | Pipe OD** | Weight     |
|-------------------|-------|---------------|------------|-----------|------------|
| 803-3401          | 3"    | 5/8" x 3"     | 3/8" x 2"  | 3.96      | 5.75 lbs.  |
| 803-3402          | 4"    | 5/8" x 3"     | 1/2" x 2"  | 4.80      | 7.25 lbs.  |
| 803-3403          | 6"    | 5/8" x 3"     | 1/2" x 2"  | 6.90      | 8.90 lbs.  |
| 803-3404          | 8"    | 5/8" x 3"     | 1/2" x 2"  | 9.05      | 10.85 lbs. |
| 803-3405          | 10"   | 5/8" x 3"     | 1/2" x 2"  | 11.10     | 12.65 lbs. |
| 803-3406          | 12"   | 5/8" x 3-1/2" | 1/2" x 2"  | 13.20     | 14.35 lbs. |

### #585 Washers

- For 3" - 12" Socket Clamps
- Usage for 3/4" rod
- Two washers are required for each Socket Clamp

| Trumbull Item No. | Material | Bore Size | Weight    |
|-------------------|----------|-----------|-----------|
| 364-9000          | CS       | 1"        | 0.80 lbs. |
| 803-9000          | SS       | 1"        | 0.80 lbs. |

\* Sizes 3" through 12" are supplied with #585 cast washers which are shown above. Sizes 14" and larger are supplied with two fabricated carbon steel washers.

\*\* Socket Clamps are designed for centrifugally-spun cast and ductile iron pipe with OD's as shown.