

T-Head Bolts and Nuts

Stainless Steel T-Head Bolts

Type 304 and Type 316

Ideal for corrosive soils. Provided with coated stainless steel heavy hex nut to prevent galling. Heads are stamped with the type of stainless. The 3/4" x 4" bolt is threaded 1/2" longer than the standard to permit use as a 3/4" x 3-1/2" bolt.



TYPE 316 BOLTS
include a red Nut

TYPE 304 BOLTS
include a green Nut


Size	Type 304	Type 316
	Trumbull Item No.	Trumbull Item No.
3/4" x 3-1/2"	364-3487	364-3387
3/4" x 4"	364-3488	364-3388
3/4" x 4-1/2"	364-3489	364-3389
3/4" x 5"	364-3493	364-3393
1" x 6"	----	364-3394



"Cor-Blue" Bolts

Manufactured from corrosion-resistant, high-strength, low-alloy steel in accordance with ANSI/AWWA C111/A21.11, that has a baked-on ceramic-filled fluorocarbon resin, which handles the needs of highly corrosive conditions.

Size	Trumbull Item No.
5/8" x 3"	364-3343
3/4" x 3-1/2"	364-3354
3/4" x 4"	364-3355
3/4" x 4-1/2"	364-3356
3/4" x 5"	364-3357
1" x 6"	364-3359

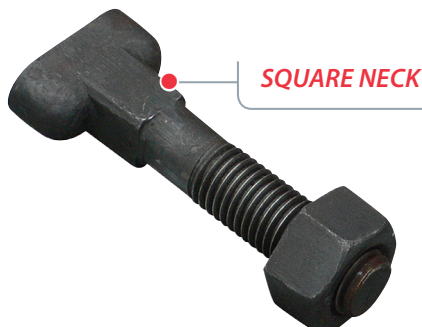

SQUARE NECK

Anti-Rotation T-Head Bolts (Corten)

Also Known as "Lugged T-Bolts"

Used on slotted opening in the MJ bells of hydrants and valves. Square neck on shank of bolt locks in slot to prevent rotation when nut is tightened. Provided with heavy hex nut.

Size	Trumbull Item No.
3/4" x 3-1/2"	364-3390
3/4" x 4"	364-3392