



US Patent No.'s 8,550,115 / 9,347,583 / 10,066,760

Valve Position Indicators

For Buried Service with **Round** Extension Stems

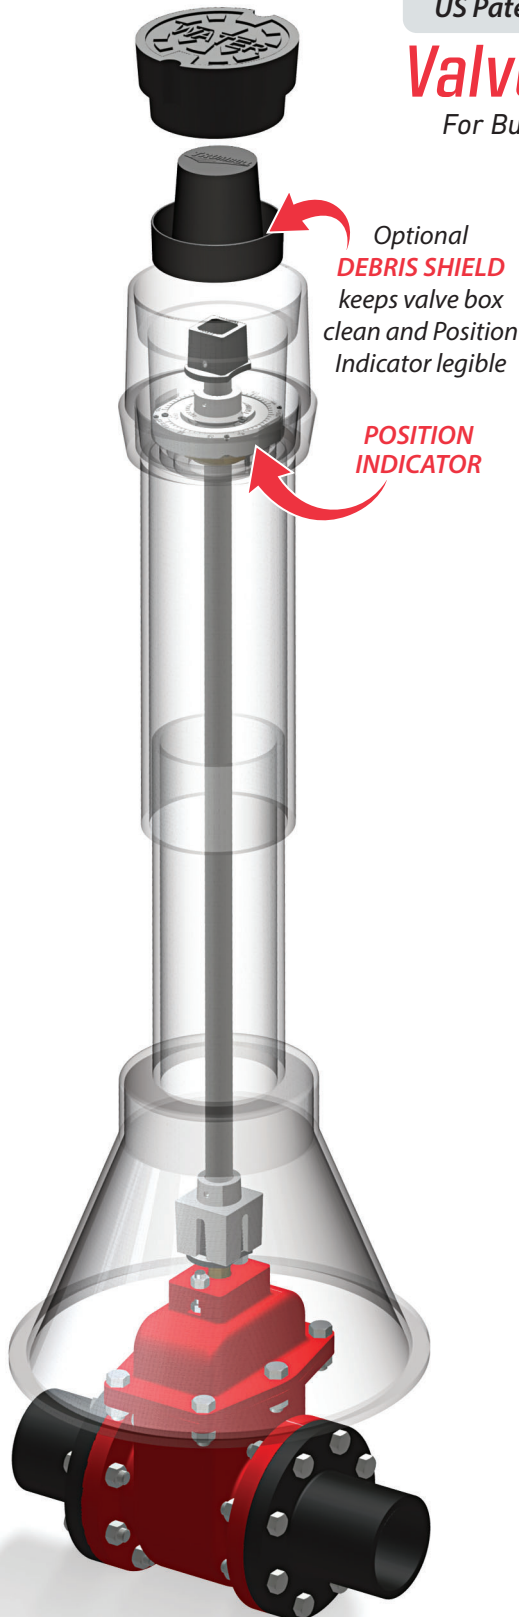

- Eliminates broken valve stems caused by over-opening or over-closing
- Field-adjustable for any number of turns within the range of each model
- Constructed of heavy-duty, non-corrosive DuPont™ Delrin® polymer, providing high-impact resistance even in cold climates
- Double O-ring seals keep out water and dirt
- Third-party tested to over 1 million revolutions
- Provided with stainless steel hardware
- Also available for use above ground in the floor or with Wall Brackets (see pages F-7 to F-10)

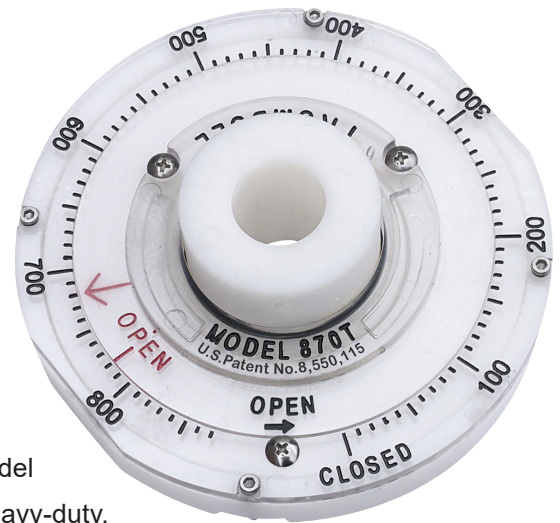

Ordering Instructions


1. Specify direction of open (open left or open right)
2. Model required (available in 57, 275 or 870 turns)

Model Number	Number of Turns	Open Left	Open Right
		Trumbull Item No.	Trumbull Item No.
57T	0 - 57	367-9404	367-9403
275T	0 - 275	367-9406	367-9405
870T	0 - 870	367-9410	367-9409

3. Extension Stem required (round)
 - a. Length required (provide "A" dimension on the illustration shown on right side of page F-6)
 - b. OD required (maximum OD of 1.75")
 - c. Carbon steel or stainless steel
4. Debris Shield, item **367-9415** recommended for buried service

Exploded Views


of Round Extension Stems
for Buried Service

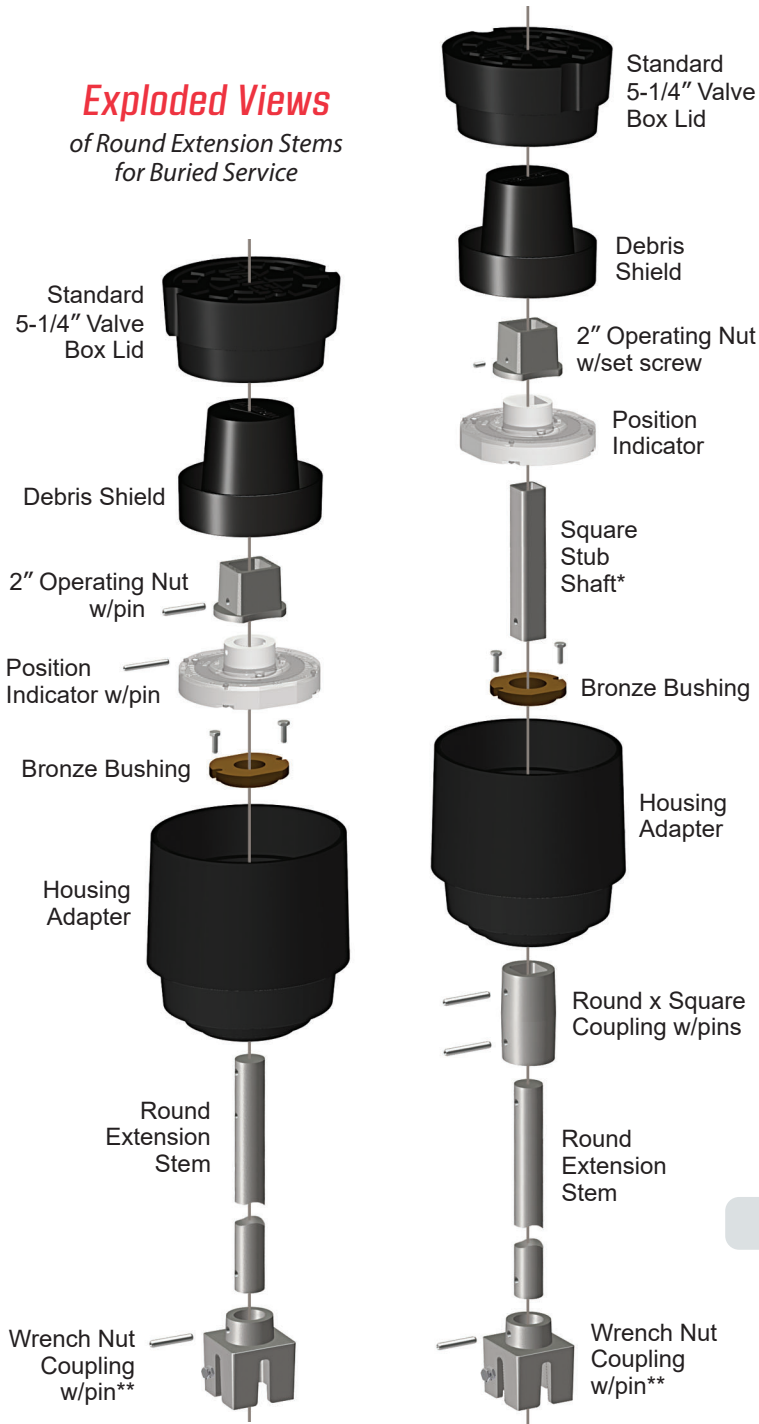

ROUND EXTENSION STEM or **ROUND EXTENSION STEM with Square Stub Shaft***

* Using a square stub shaft saves field drilling and installation of pins inside housing adapter.

** Wrench nut coupling normally furnished pinned to stem.

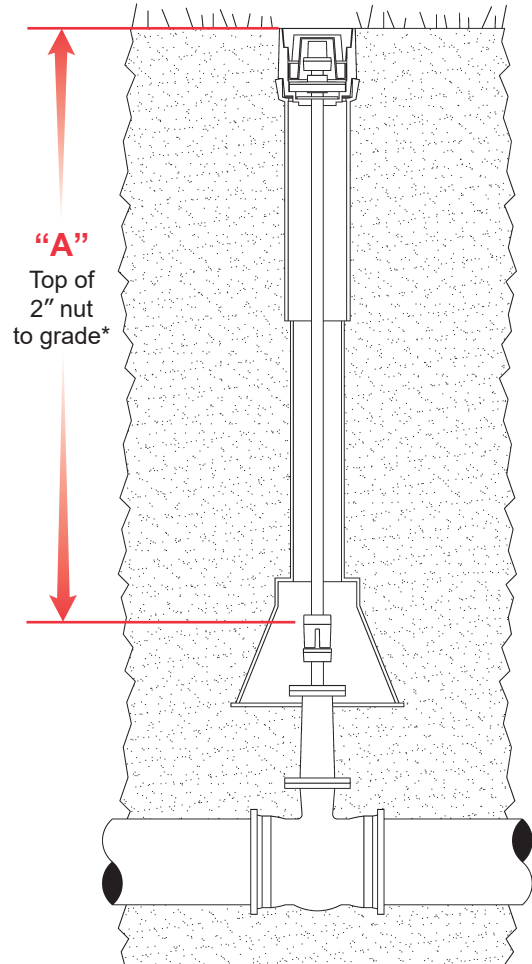

* The dimension from top of 2" valve nut to grade is used to determine Extension Stem length, per ordering instructions on page F-5.

US Patent No.s 8,550,115 / 9,347,583 / 10,066,760

Extension Stem Torque Ratings

Consult your Trumbull Rep for torque ratings.

YouTube

Installation animations online:
www.youtube.com/trumbullmfg