


TRUMBULL INDUSTRIES, INC.

1040 N. Meridian Rd., P.O. Box 1556, Youngstown, Ohio 44501 Phone: (330) 799-3333
www.trumbull-mfg.com Toll Free: 1-800-677-1799 FAX: (330) 797-3215

CHAIN LEVERS FOR 1/4 TURN, ELEVATED VALVES

Chain Levers are used for manual operation of elevated quarter-turn valves.

Chain Levers save the unnecessary expense of adding a gear and chainwheel to valves that don't require a gear to operate.

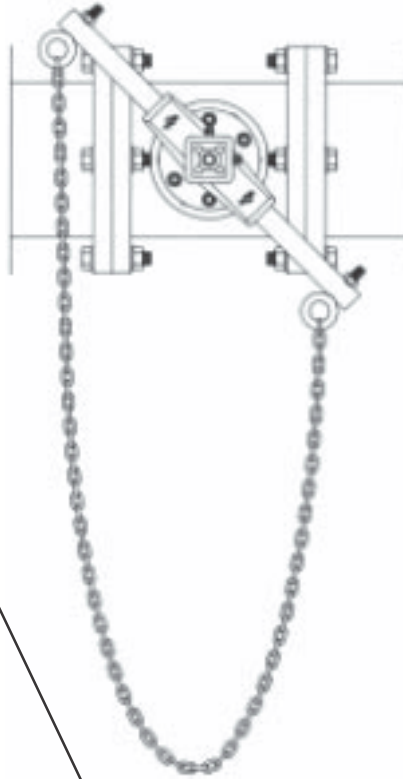


Handles are 1" sch 40 pipe.
Stocked with an overall length of 24".
Longer lengths made to order.

Heavy duty ductile iron head casting;
stronger, yet lighter than grey iron.

Head joined to handles with
plated clevis pins and cotter keys.

Chain Lever provided with
plated eyebolts, hardware
and connector links.

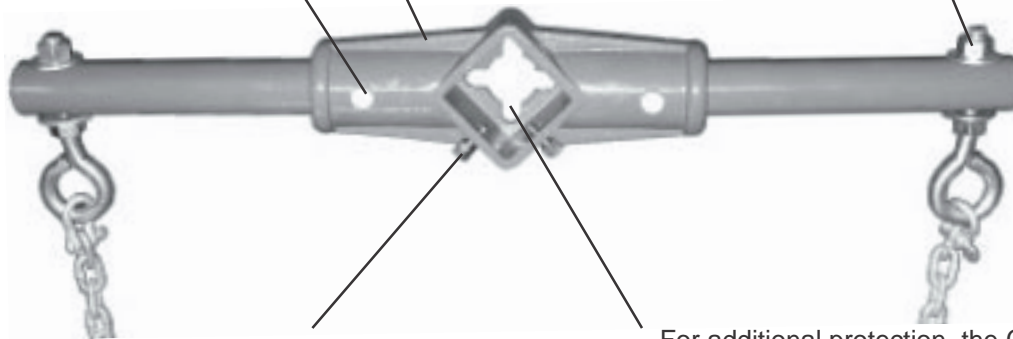

The Chain Lever is retained to the 2" square operating nut with two hex head cap screws and jam nuts; these screws must be tightened securely to keep the Chain Lever from working loose during operation.

For additional protection, the Chain Lever can be pinned to the 2" nut, or held by capscrews (not provided) thru the slots provided in the back of the socket casting.

**Trumbull
Item No.**
367-9988
172-1219

Description
Chain Lever, with handles and hardware, 24" overall length
Machine chain, straight link, size 2/0 (order specific quantity of chain required)

Weight
8#